


# Ceiling Cableway System

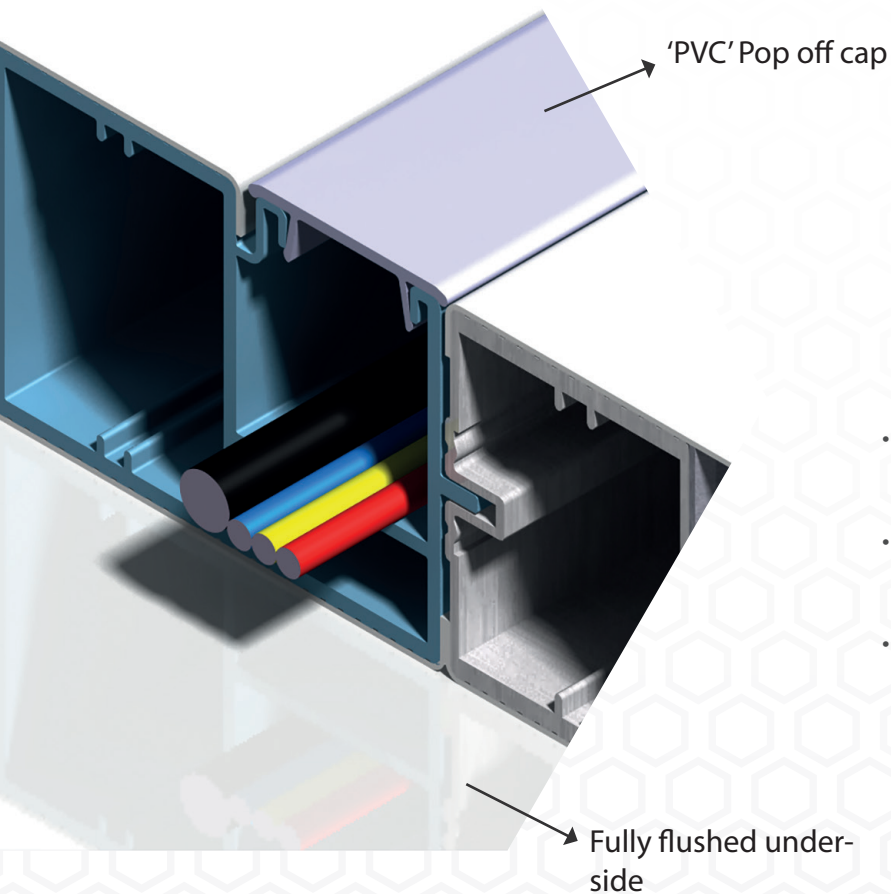

Remove trip hazards with concealed and accessible cable run

- Newly designed 64mm extruded 6063 aluminium box section frame to allow for cable containment + 49mm
- Cable tray can be installed in any directional sense to suit site requirements
- Joint face includes tongue which allows for panel alignment and complies with existing Puracore<sup>®</sup> system

## Summary Specification

Components	Aluminium box section cableway frame with cover and top hat
Thickness	50mm or 65mm
Stand Dimensions	1200mm x 3000mm
Maximum Length	Up to 6000mm
Material	6063 aluminium extrusion
Sealing	Installed as a standard panel and sealed on-site
Fixing	Concealed suspension system and top hat/ UB403 hanger